EU-TYPE EXAMINATION CERTIFICATE

The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

CTC



Accreditation n# 5-0594 RECORD Scope available on: structs www.cofrac.fr

MARKIN

TIFIED BOD

n° 0075

V CT

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

RICHA NV

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:
Article code	:
Technical file index	:
Last update	:

AIRSTREAM 3 JACKET WOMEN

Women Black - 2ASDIII100, Women Black/White - 2ASDIII1800, Women Black/Pink - 2ASDIII700

01

JANUARY 2023

IDENTIFICATION

Reference of the product	:	AIRSTREAM 3 JACKET WOMEN
Article code	:	Women Black - 2ASDIII100, Women Black/White - 2ASDIII1800, Women Black/Pink - 2ASDIII700
This product is a		Minor Variant
Technical file index :	:	01
Last update :	:	JANUARY 2023

Manufacturer:

RICHA NV

Westerring 27, 9700 Oudenaarde

BELGIUM

tel : 0032 55 235326 fax : 0032 55 428110

Factories:

PAK WORLD INDUSTRY

Dheera Sandha, 5km-Main Pasroor Road, Link Cshauni, Sialkot PAKISTAN

GARMENT DESCRIPTION

General description and intended use:

This product is a Jackets and it is a minor variant of the model AIRSTREAM 3 JACKET.

This garment is a caterogy II PPE.

This garment is designed for motorcycle riders. It offers a minimum necessary degree of protection from impact and abrasion, using materials and construction that meet lower requirements than for parts 2 and 3 of the EN 17092 series. Class A garments are expected to have the least ergonomic and weight penalties.

Visual description of the garment :



		Applicable	Covered by
		represente	Standard
§1	Requirements defined in the Annex II §1 are applicable to all PPE	\checkmark	Instruction for use
31		v	Marking
			Standard
§1.4	Manufacturer's instructions and information is available	\checkmark	✓ Instruction for use
5			Marking
	PPE incorporating adjustements systems		Standard
§2.1		\checkmark	✓ Instruction for use
			✓ Marking
			Standard
§2.2	PPE is designed and manufactured in a way that perspiration resulting from use is	\checkmark	✓ Instruction for use
	minimised. Otherwise it must be equipped with means of absorbing perspiration.		Marking
	If it is known that the design performance of new PPE may be significantly affected by		Standard
§2.4	ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE	\checkmark	✓ Instruction for use
	placed on the market and on its packaging.		✓ Marking
	Where appreciable and rapid deterioration in PPE performance is likely to be caused by ageing resulting from the periodic use of a cleaning process recommended by the manufacturer, the latter must, if possible, affix a marking to each item of PPE placed on the market indicating the maximum number of cleaning operations that may be		Standard
§2.4			✓ Instruction for use
	carried out before the equipment needs to be inspected or discarded. Where such a marking is not affixed, the manufacturer must give that information in his instructions		Marking
		V	Standard
§2.5	PPE which may be caught up during use		✓ Instruction for use
			Marking
			Standard
§2.9	PPE incorporating components which can be adjusted or removed by the user	\checkmark	✓ Instruction for use
			Marking
	DDE boaring and ar mars identification markings ar indicators directly or indirectly		✓ Standard
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	\checkmark	✓ Instruction for use
			✓ Marking
			✓ Standard
§2.14	Multi-risk PPE	\checkmark	✓ Instruction for use
			✓ Marking
	The PPE is intended to protect against impact caused by falling or ejected objects and		✓ Standard
§3.1.1	collisions of parts of the body with an obstacle	\checkmark	✓ Instruction for use
	isonisions of pures of the body with an obstable		✓ Marking
			✓ Standard
§3.3	The PPE is intended to protect against mechanical injuries	\checkmark	✓ Instruction for use
			✓ Marking
Specific			✓ Standard
Specific application	Motorcycle garment	\checkmark	✓ Instruction for use
		-	✓ Marking

Garment constitution

	Material reference	Material description	Color	Basis weight	Pres	one?	
			Color	or thickness	Z1	Z2	Z3
	PW-MT#290	POLYAMID FABRIC CH-3324 (02-01-02- 009)	BLACK	282 g/m²		х	х
	PW-MT#199	H-831783 RIP STOP POLYESTER FABRIC D2-01-041) BLACK		295 g/m²	х	х	х
Outer material	PW-MT#141	POLYESTER PD MESH (3332) CH-3332-APD	310 g/m²		х	х	
	PW-MT#161	POLYESTER CORDURA 600D (02-01-02- 047) (on top)	PINK	240 g/m²			
	PW-MT#158	POLYESTER CORDURA 600D (02-01-02- 006) (on top)	WHITE	240 g/m²			
Lining	PW-MT#22	MICRO MESH FABRIC (02-02-03-002)	BLACK	115 gsm			
Lining	PW-MT#5	POLYESTER LYCRA (02-02-14-001)	Black	204 gsm			
	PW-MT#66	POLYESTER TAFFETA 210-T FABRIC (02-02- 13-002) BLACK 104 gsm		104 gsm			
Removable lining	PW-MT#28	QUILT 2" STRAIGHT LINE 190T + GREY		320 g/m²			
	PW-MT#18	POLYESTER FOAMY MESH	BLACK				
Protector	PW-MT#33	KOREAN FABRIC 190-T (02-04-006)	BLACK	60 gsm			
pocket	GEN-MT#47	VELCRO (HOOK & LOOP) 0,75 INCH (04-05- 007)	BLACK				
Caller	PW-MT#75	POLYESTER MICRO FABRIC (02-02-15-018)	BLACK	110 g/m²			
Collar	PW-MT#61	POLYESTER NEOPRENE (02-02-07-002)	BLACK	489 gsm			
Button	GEN-MT#24	R RUBBER COATED BUTTON (04-01-052)	BLACK		_		
	GEN-MT#12	YBS CONNECTION ZIP #8 (LOWER PART) (28-01-13-008)	BLACK				
Zip	GEN-MT#45	SBS NYLON ZIP #5 (28-02-06-006)	BLACK				
	GEN-MT#147	YKK #5 NYLON ZIPPER	RED				
	GEN-MT#39	YKK VISLON #8 O/E AUTO (28-01-09-051)	BLACK				

Material combinations

	Material reference	Combination present in zone?			
	Material reference	Zone 1	Zone 2	Zone 3	
Material combination 1	PW-MT#290 + PW-MT#22		х	х	
Material combination 2	PW-MT#199 + PW-MT#22	х			
Material combination 3	PW-MT#141 + PW-MT#22		х	х	
Material combination 4	PW-MT#290 + PW-MT#66		х	х	

Description of the seams

SEAM CONSTRUCTION: BLACK VARIANT

1) CENTRAL ZIPPER: [PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + PW-MT#66 - POLYESTER TAFFETA 210-T FABRIC (PAKWORLD) + GEN-MT#39 - YKK VISLON #8 O/E AUTO (YKK): 6mm from edge] + [PW-MT#66 - POLYESTER TAFFETA 210-T FABRIC (PAKWORLD) + GEN-MT#39 - YKK VISLON #8 O/E AUTO (YKK): 6mm from edge]

2) CUFF ZIPPER: [PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + PW-MT#75 - POLYESTER MICRO FABRIC (02-02-15-018) + GEN-MT#45 - SBS NYLON ZIP #5 (SBS): 6mm from edge] + [PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + CUFF MATERIAL + GEN-MT#45 - SBS NYLON ZIP #5 (SBS): 2mm from edge]

A3) PW-MT#141 - POLYESTER PD MESH (3332) CH-3332-APD (02-01-078) + HORIZONTAL ACCORDION [PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + PW-MT#104 - FOAM (02-02-05-002) + PW-MT#108 - PIPE ELASTIC (02-02-04-001)]: 2mm from edge

B1) PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + [PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + PW-MT#37 - FOAM (02-02-05-002) + PW-MT#20 - POLYESTER FABRIC 210-T (02-04-018)]: 6mm from edge

B4) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009): 6mm from edge

B5) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + PW-MT#141 - POLYESTER PD MESH (3332) CH-3332-APD (02-01-078): 6mm from edge

B8) PW-MT#141 - POLYESTER PD MESH (3332) CH-3332-APD (02-01-078) + PW-MT#141 - POLYESTER PD MESH (3332) CH-3332-APD (02-01-078): 6mm from edge

B9) PW-MT#141 - POLYESTER PD MESH (3332) CH-3332-APD (02-01-078) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009): 6mm from edge

D2) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009): 2+6mm from edge

D3) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041): 2+6mm from edge

4) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + [PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

SEAM CONSTRUCTION: BLACK/RED VARIANT

3.1) PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + [PW-MT#159 - POLYESTER CORDURA 600D (02-01-02-005) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

4.1) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + [PW-MT#159 - POLYESTER CORDURA 600D (02-01-02-005) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

SEAM CONSTRUCTION: BLACK/FLUO YELLOW VARIANT


3.1) PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + [PW-MT#76 - POLYESTER CORDURA 600D (02-01-02-049) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

4.1) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + [PW-MT#76 - POLYESTER CORDURA 600D (02-01-02-049) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

SEAM CONSTRUCTION: BLACK/PINK VARIANT

3.2) PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009) + [PW-MT#161 - POLYESTER CORDURA 600D (02-01-02-047) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

4.2) PW-MT#199 - CH-831783 RIP STOP POLYESTER FABRIC (02-01-041) + [PW-MT#76 - POLYESTER CORDURA 600D (02-01-02-047) + PW-MT#290 - POLYAMID FABRIC CH-3324 (02-01-02-009)]: 6mm from edge

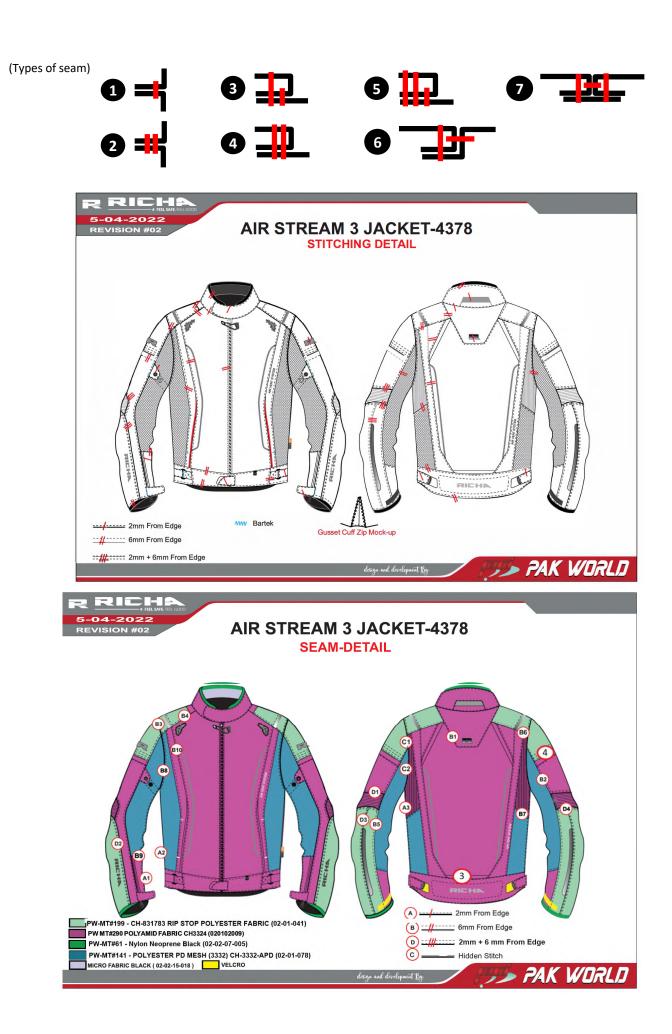

PROTECTION SCOPE

This garment meets the essential health and safety requirements of the Personal Protective Equipment Regulation (UE) 2016/425. It is a category II product.

This garment is designed for motorcycle riders. It offers a minimum necessary degree of protection from impact and abrasion, using materials and construction that meet lower requirements than for parts 2 and 3 of the EN 17092 series. Class A garments are expected to have the least ergonomic and weight penalties.

GENERAL REQUIREMENTS

Range of size							
Size	XS	S	М	L	XL	2XL	3XL
Heigh (cm)	163-169	166 - 172	169 - 175	172 - 178	175 - 181	178 - 184	181 - 187
Chest or bust girth (cm)	86-90	90 - 94	94 - 98	98 - 102	102 - 106	106 - 110	110 - 114

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Standard EN 17092-4:2020

			Zone 1	Zone 2	Zone 3	
Dimensional stability of t (N/A if no cleaning requi	%	± 5				
Impact protector location	and fixation	over the correct location on the body, secured within the pockets and secured in their position.				
External impact protecto	r location and fixation	pocket shall meet the requirements of the appropriate zone. Protector shall not be released during testing.				
Impact abrasion	Darmstadt / no hole on the 9 test pieces	rpm	265	147	n/a	
Seam strength	by zone	N/mm	≥6	≥6	≥4	
Seam Stiength	protector pocket	N/mm		≥4		
	general	-	at leas	st one line pro	tected	
Seam construction leather or textile abrasion overlays		-	at least 2 rows of stitching			
hard shell overlays		-	at least 2 rows of stitching			
Toor atropath	by zone	N	≥35	≥25	≥25	
Tear strength	protector pocket	N	≥10			
	Two pieces suits	no gap and no opening				
Restraint	sleeve	no extraction of the cone				
	Thumb loops distance A-B	mm	max 140			
Innocuousness EN ISO 13688:2013 § 4.2 + REACh		pH, Cr VI (leather), Ni (metal in contact with Azo dyes (if contact with skin), Tin, Cadmir (coated material), PAH (plastic in contact with phtalates (polymers in contact with skin)			Cadmium (internet internet int	
Structural closure	same test as seams	N/mm	≥6	≥6	≥4	
Vents	protected by same SSL or by SSL zone 3 if opening limited to 4cm at 90° of the length					
Pockets	protected by same SSL extended along the interior of the pocket beyond the opening at least an additional 3 cm					
Fit and ergonomics	EN 17092-1, 5.5 : all answers positive					

			TEST REPORTS		
1	SATRA 2777/10609-01/E00-00	12	L220202518_1	23	IDIADA MT21010079
2	SATRA 2777/10608-02/E00-00	13	L210917029_2	24	L220202532_1
3	SATRA 2777/13054-03/E00-00	14	L210712645_1	25	IDIADA MT21050137
4	SATRA 2777/10815-01/E00-0	15	L220509662_1	26	IDIADA MT18030201
5	SATRA 2777/11251-01/E00-00	16	L221121477_1	27	L220814650_1
6	SATRA 2777/10813-03/E00-00	17	L220814649_1	28	L210712641_1
7	SATRA 2777/10837-01/E00-00	18	L201220679_1	29	L220713113_1
8	SATRA 2777/10804-01/E00-00	19	L210508075_1	30	L210612129_1
9	SATRA 2777/10807-01/E00-00	20	L210713479_1	31	L210509500_1
10	L220304259_1	21	L210917523-1	32	L220304226_1
11	L221222943_1	22	L220509086-2	33	L210508209_1

		Reports
4.1 - General		
4.1.1 Innocuousness and REACh - Annex >	(VII	18+19+20+21+22+23+24+25+
		26+27+28+29+30+31+32+33
4.1.3 Dimensional stability of garments	Washing Température : 30° Number of washing cycles : 5	17
4.2 - Impact Energy Absorption		
4.2.1 General		1+2+3+4+5+6+7+8+9+17
4.2.2 Impact protector location and fixation	on	1+2+3+4+5+6+7+8+9+17
4.3 Impact abrasion resistance		12+13+17
4.4 - Structurally Strong Seams (SSS)		
4.4.1 - General		16
4.4.2 Seam strength		10+17
4.5 - Tear strength		
4.5 Tear strength	12+13+14+17	
4.6- Restraint		
4.6.1 - General		n.a
4.6.2 Two-piece suit requirements for join	11	
4.6.3 Garment sleeve restraint	17	
4.7- Additional garment construction	requirements	
4.7.2 - Structural closures		15+17
4.7.3 - Vents		n.a
4.7.4 - Pockets		17
4.7.5 - Zone intrusions	n.a	
4.7.7 - Use of open mesh materials		17
4.7.8 - Use of retroreflective materials (optional)	Performance of the retroreflective materials shall be in conformity with Clause 6 of EN 1150:1999. This requirement does not apply to reflective elements included for reasons of design or decoration.	n.a
4.8 Fit and ergonomics		17


MARKING - PACKAGING

Marking of the garment:

Logo of Manufacturer Address of Manufacturer Logo CC Product reference: AIRSTREAM 3 JACKET WOMEN Article Code: Vomen Black - 2ASDIII100, Women Black/White - 2ASDIII1800, Women Black/Pink - 2ASDIII700 Size indicator Size indicator Pictograms Indication of the protection Class A Indication of the protection Class A Date of Manufacture (month/year) and/or serial/batch number Date of obsolescence (month/year) if applicable

Location of the marking: Inner labels

Garment marking example:

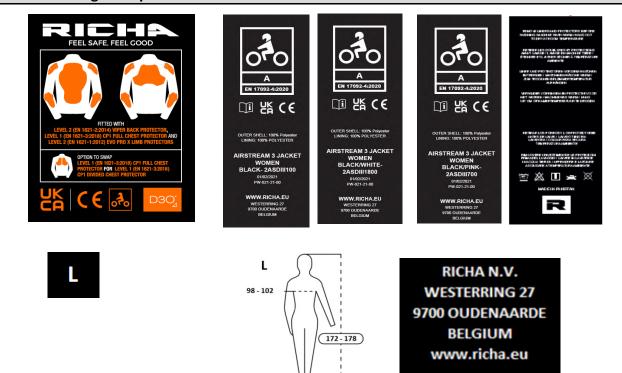

Method of marking of the garment:

Labels

PPE subject to ageing :

Peremption period: 5 years when stored in appropriate conditions (humidity, temperature, clean , ventilated, light). Before use, the garment shall be visually controlled. In case of deterioration the garment must be scrapped (abrasion, cut, tear, ...).

Cleaning instructions: Number of cleaning cycles: Care Instructions: Remove the protectors before cleaning Machine wash 30° Line dry

MEANS OF CONTROL

1. Research and development

- Testing of separate materials: fabrics tested on impact & abrasion resistance and tear resistance. All materials tested on pH, Azoïcs and/or CrVI

- Testing of complete product: seam strength, ergonomics and other required tests to reach certification to the EN standard.
- 2. Sourcing
- 3. Purchasing
- 4. Documentation and traceability
- 5. Receipt of raw materials / Control of supplies
- Testing of raw materials in laboratory: pH & Azoïcs test with every new shipment. CrVI testing for leather.
- 6. Quality control during manufacturing
- 7. Quality control of finished products
- 8. Quality control packaging & labels
- 9. Quality control finished shipment
- 10. Quality control necessary documents
- 11. Receipt and inspection of documents and finished products at headquarters
- 12. Written evaluation finished order

